



## Ultra Balustrade Angle Adjustable Tube Connector

**18.0312.242.12**

When you need a solution for just about any angle, this adjustable connection piece provides the answer. Produced to fit flush with 42.4mm tube, this high quality satin finished connector compliments our ultra corrosion resistant range. Simple to fix using a high strength stainless steel fixative to provide a neat, strong connection without any fuss or mess.

### Ultra Range

The Ultra range of products are perfect for installation in harsh environments such as swimming pools and coastal areas. This high quality corrosion resistant stainless steel range is produced with an extra resistance to tea-staining and pitting that isn't available anywhere else on the market.

### Product Information


Grade: 2205 stainless steel

Tube Diameter: 42.4mm

Height: 27mm

Adjustment is 90° in each direction

Finished to a brushed satin

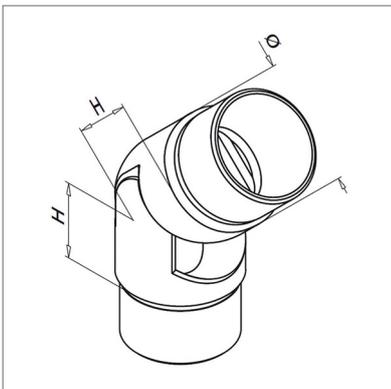

### Key Features

**2205** Manufactured from 2205 corrosion resistant stainless steel.

**42.4** To fit 42.4mm diameter stainless steel tube.

 For rapid installation, we recommend fixing with **high strength fixative**

**180°** Adjustment is a total of 180°, providing 90° in each direction.

 To a superb brushed satin finish.

### Care Instructions



We recommend you should treat your Ultra balustrade angle adjustable connector on a regular basis to ensure long-lasting perfection.

We recommend using either WD-40 or a similar product to wipe down your Ultra angle adjustable tube connector or using a specialist chemical stainless steel cleaner to remove heavy dirt and rust stains.

**Q-Ultra-Clean** rebuilds and strengthens the passive layer of stainless steel.

### Design

You can send us your drawings, technical drawings or even a freehand sketch.

From this we'll produce an accurate quotation for you. This service is completely free with no hassle or obligation.

Give us a call for any advice Monday to Friday 9.00am to 5.00pm

Contact us

Email: [info@s3i.co.uk](mailto:info@s3i.co.uk)

Telephone: **01302 752 504**

Fax: **01302 752 410**