



Ultra Balustrade Glass Clamp

18.2806.042.12

The most popular choice to provide a glazed system between upright tubular posts. These D shaped glass clamps are manufactured from ultra corrosion resistant stainless steel and tested to extremely high levels of safety. Providing an effective and tidy way to support glass balustrade.

We recommend for a quick and easy installation using our range of [pre-drilled Ultra baluster posts](#).

Optional extras such as security pins to provide heavier clamping loads and fitting tools are available.

Ultra Range

The Ultra range of products are perfect for installation in harsh environments such as swimming pools and coastal areas. This high quality corrosion resistant stainless steel range is produced with an extra resistance to tea-staining and pitting that isn't available anywhere else on the market.

Product Information



Grade: 2205 stainless steel

Tube diameter: 42.4mm

To fit mono glass: 6mm to 10mm

To fit laminated glass: 6.76mm to 9.52mm

Finished to a brushed satin

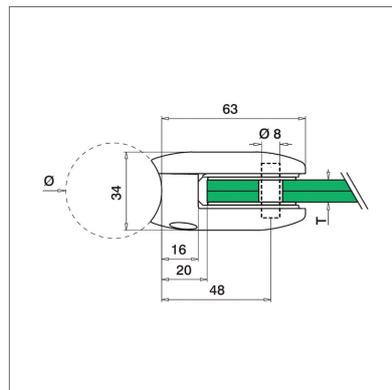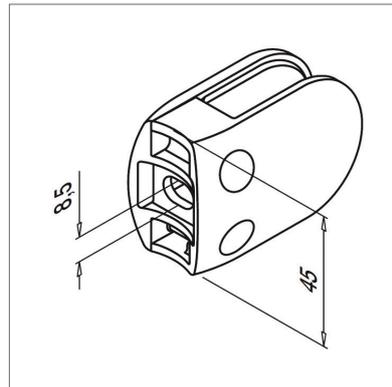

Key Features

 Manufactured from 2205 corrosion resistant stainless steel.

 This product requires **M8x 20 Hex Socket Head Cap Screw**

 To fit 42.4mm diameter stainless steel tube.

 This product requires a socket head wrench for installation.

 To fit mono glass: 6mm to 10mm
To fit laminated glass: 6.76mm to 9.52mm

 To a superb brushed satin finish.




Ultra Balustrade Glass Clamp

18.2806.042.12

We Recommend: Security Pin



Security Pin manufactured to provide additional support to glass panels. Please note glass panels will require drilling to fit this item, product code: 19.5015.022.18



Glass Clamp Installation



Taking one half of your glass clamp, using a M8 x 20 hex socket head cap screw (available separately) align into position then tighten with a hex key.



Using the supplied rubber gasket, simply install in to each side of your glass clamp.



Once you have installed your half constructed glass clamps, fit glass panel into position, either by hand or by using a glass suction fitter tool (recommended). Using the the glass support fitting aid to assist with alignment.



Align and install the second half of your glass clamp with the provided hex screws. tighten with a hex key so that your glass panel is secure in the correct position, checking there is no movement.



Once checked, simply fit the supplied hex screw cover caps.

Tools and Fixings

We carry a large selection of **balustrade accessories** that you may need for the installation of your stainless steel balustrade. These are designed to work with all our various ranges of stainless steel balustrade.




M8 x 20 Hex Head Screw



Glass Suction Fitter



Glass Fitting Aid, the perfect tool for supporting glass panels during installation



This product requires a **socket head wrench** for installation.

Care Instructions



We recommend you should treat your Ultra balustrade glass clamp on a regular basis to ensure long-lasting perfection.

We recommend using either WD-40 or a similar product to wipe down your Ultra glass clamp or using a specialist chemical stainless steel cleaner to remove heavy dirt and rust stains.

Q-Ultra-Clean rebuilds and strengthens the passive layer of stainless steel, product code:

Design

You can send us your drawings, technical drawings or even a freehand sketch.

From this we'll produce an accurate quotation for you. This service is completely free with no hassle or obligation.

Give us a call for any advice Monday to Friday 9.00am to 5.00pm

Contact us

Email: info@s3i.co.uk

Telephone: **01302 752 504**

Fax: **01302 752 410**