


D Shackle with Split Pin - Duplex D6 Stainless Steel

CARCANO ITALY **CARTEC60**

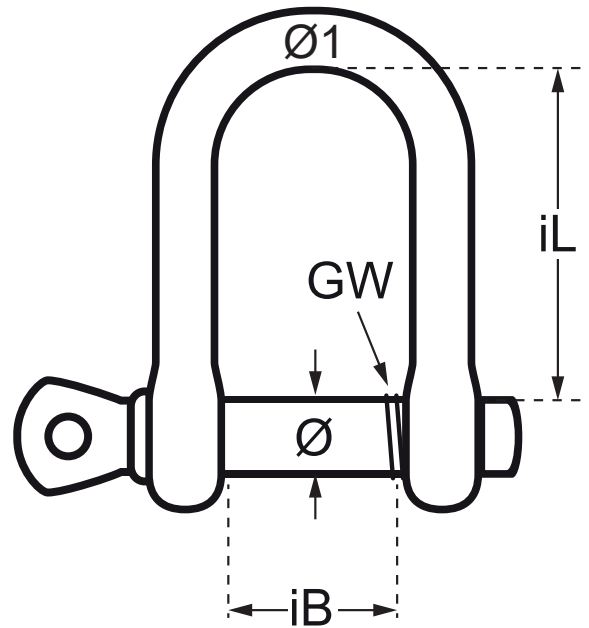

Code	GW	Ø (mm)	Ø1 (mm)	iL (mm)	iB (mm)	*WLL (kg)	*Break Load (kg)
DX-D-090	M10	9	8	33	18	500	2000
DX-D-130	M14	13	12	40	25	1250	5000
DX-D-170	M18	17	16	60	32	2000	8000
DX-D-210	M22	21	19	78	41	3200	12,800
DX-D-290	M30	29	25	109	56	5000	20,000
DX-D-380	M39	38	34	152	76	13,000	52,000

*Break loads and working load specifications are only valid for correct axial single-line suspension without spreading.

Stainless Steel Duplex D6 - AISI 318LN construction.

Grade 60, Safety coefficient 4.

Manufactured in Italy by Carcano.