

End Fixing

For anchoring into concrete ceilings, metal decking and pressed metals

FEATURES / BENEFITS


- Supplied with Drop-in Anchors
- Available in M6, M8 and M10, up to 225 kg SWL, with a 5:1 safety factor
- Supplied as a ready-to-use kit with wire and Gripple hanger
- Available in lengths from 1 to 10 m
- Other lengths are available on request
- Also available in Stainless Steel



INSTALLATION

- Drill concrete (Use wire brush to ensure the hole is clear)
- Push in the Drop-in anchor
- Use a hammer to drive in the setting punch to expand the anchor
- Screw in the stud

SPECIFICATION

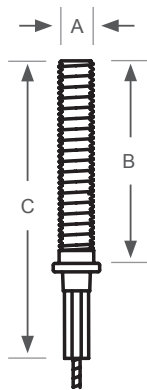

Size	A Ø	B (mm)	C (mm)
No.1 (0 - 15 kg)	M6	20	48
No.2 (15 - 45 kg)	M6	20	48
	M8	45	70
	M10	45	77
No.3 (45 - 90 kg)	M6	20	48
	M8	45	70
	M10	45	77
No.4 (90 - 225 kg)	M10	45	77

SUBMITTAL INFORMATION


Safe Working Load:
Up to 225 kg

Use with a No.1, No.2, No.3 or No.4
Gripple hanger

Material:
Steel

Finish - BZP

AVAILABLE HANGERS

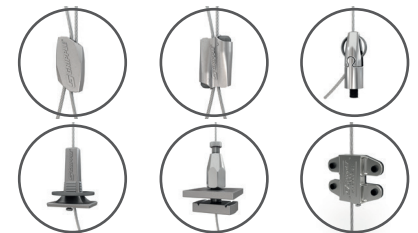

For more options on available hangers please contact us or visit www.gripple.com

IMPORTANT RECOMMENDATIONS

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact Gripple Ltd. The responsibility for judgement of base material strength lies with the installer, and not with Gripple Ltd.
2. Not to be used in marine, coastal or corrosive environments.
3. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the users responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
4. Whilst Gripple Ltd can give general guidance and advice, the nature of Gripple products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
5. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Gripple Ltd.