S3i Limited | 1 Faraday Close | Snape Lane | Harworth | DN11 8RU
E info@s3i.co.uk | T +44 01302 752 504 | F +44 01302 752 410

Wichard D Shackle - Captive Pin

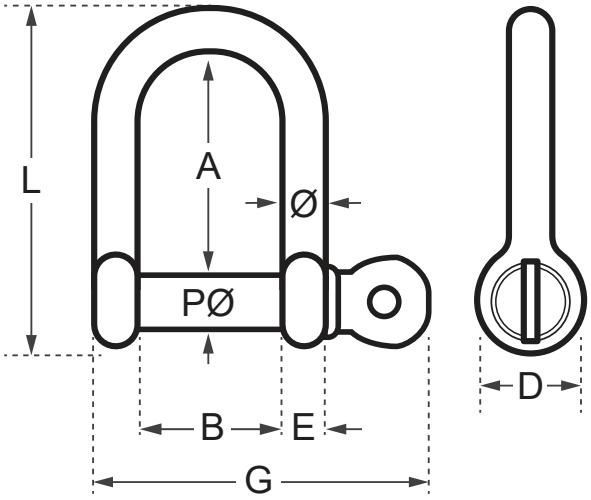

Code	Ø (mm)	PØ (mm)	L (mm)	A (mm)	B (mm)	D (mm)	E (mm)	G (mm)	WLL (kg)	Working Load* (kg)	Break Load (kg)	Weight (kg)
WD-1401	4	5	24	13	8	9	4	22	200	320	1000	0.009
WD-1402	5	6	27	16	10	11	5	30	300	480	1500	0.016
WD-1403	6	7	36	20	12	14	6	32	440	680	2200	0.028
WD-1404	8	9	47	26	16	18	8	42	720	1000	3600	0.061
WD-1405	10	11	58	33	20	21	9	53	1040	1520	5200	0.114
WD-1406	12	13	69	39	24	24	11	62	1400	2080	7000	0.188

* Working Load refers to nautical applications.
Working Load Limit (WLL): for industrial applications only. WLL = 5:1 safety factor of the break load.

A note about dimensional information
Please be aware that dimensions published on our site should be treated as indicative.
We publish dimensions to the best of our ability, however manufacturers can, from time to time, make small alterations to their designs.
If your dimensional criteria is critical please do contact us prior to making your purchase to let us know and we will do our best to fulfil your requirements.